

www.hitechled.cn

Series All-in-one Solar Street Light

A Smart Renewable Energy Solution





















A2



rystalline Li-Ion

attery An

Motion s

IP65

Professional Len

High Efficiency

le Path

All-in-one Des





Brief Introduction:

All-in-one integrated solar led street light is a new kind of solar led street light for the road and/or area lighting. It is an green and clean renewable energy product. It integrates the high efficient solar panel, super high-output LED lamp, powerful LiFePO4 lithium battery and a smart power management controller system into a slim compact body. In addition, there is a light sensor on the lamp. At daytime, the solar panel can absorb the solar energy for battery charging, while at dusk, the LED lamp will be on automatically and the battery will supply the energy to the lamp for area illumination. What's more, the lamp can be customized with motion sensor or time control mode. Its brightness standard can be adjusted by movement or time schedule. The system continuously monitors the remaining battery charge and regulates light output automatically to extend operating time. It is extremely versatile, robust and prefect suit for those areas where there is sufficient sunlight. It is 100% powered by solar. It has solved the problem of complex installation and expensive transportation compared with traditional solar LED street light. No external cables, then it is very easy for the installation. It is extremely suit for those places where grid power is not available or wiring is not economical or convenient.

Key Features:

- Solar panel, LED lamp, battery, controller all-in-one integrated compact design;
- No external wires or cables needed; Friendly easy installation;
- Using high brightness Bridgelux/Cree chips(LM80) from USA, efficiency up to 210LM/W;LED lamp upto

130LM/W~180LM/W

- Professional optical lens design adopts light transmittance over 95%, light utilization over 60%;
- IP65 modular LED lamp with fast assembly connector;
- High quality monocrystalline PV adopt over 20% conversion efficiency (IPCE);
- MSDS passed high quality lithium Iron phosphate (LiFePO4) battery adopt lifetime over 2000cycles (5~8 years);
- 100% solar powered green renewable energy;
- Auto turn on at dusk and turn off at dawn;
- PIR motion sensor optional, help to save more power;
- Unique elegant sleek anti-storm aluminum profile design adopts corrosion protection;
- Different LED lamp source available

Benefits:

- Small volume helps to save freight cost and storage cost;
- No need trenching or wiring job, reduce labor cost and materials cost;
- Renewable energy, no electronic bills any more;
- Professional light distribution design eliminate the light waste;
- High quality durable components ensure 5 to 8 years no maintenance;
- User friendly. Plug & Play design. Fast installation. No need training;
- Green light reduce fossil fuel consumption, eliminating pollution;
- Battery backup for cloudy and rainy days;
- IP65 design suitable for any place where is sufficient sunshine;

Applications:

Street, residential road, parking lot, pathway, ramp, farm & ranch lighting, wildlife area, dock& pier, military, personal garden, plaza, highways.....any exterior area wherever there is sufficient sunlight.



Green Light, Green Life!

INTELLIGENT POWER REGULATION

The intelligent battery control system can automatically adjust the light output power according to the battery storage capacity, effectively extend the working time of the light and ensures the continuous working of the solar street light even in continual rainy days.

Sufficient Charge

100% Brightness when people nearby



30% Brightness when no one's around



Low Battery


50% Brightness when people nearby
15% Brightness when no one's around

For example when the battery storage capacity is sufficient, the lamp power is on standard output (100% brightness when it detects someone, 30% brightness when no one there). When the battery storage capacity is insufficient, it reduces the output power of the lamp (50% brightness when it detects someone, 15% brightness when no one there).



Green Light, Green Life !

HIGH QUALITY LI-ION BATTERY + ADVANCED MANAGEMENT SYSTEM



Battery determines system stability and management determines battery's stability. Traditional solar powered streetlights use lead acid batteries that have a very short life cycle and are difficult to maintain, creating massive environmental pollution and a very low ROI.

Therefore HITECHLED use Lithium-ion batteries that have **3 times** the life cycle, **4 times** the discharge ability and are not harmful to the environment in our

sealed product. However, LiFePO4 Li-ion Battery batteries need a

proper battery management system to avoid the "barrel effect".

HITECHLED uses an exclusive patented technology

battery management program, enabling the life

span of battery to last for over 6 years,

greatly improving the ROI and at the

same time helping to sustain


the earth's resources.




BATWING OPTICAL DESIGN


By choosing the high brightness CREE LED chips, the single lumen value can reach 180lm/W (@25°C). With the aluminum lamp base and professional sealed lens, it is IP65 waterproof and with excellent heat dissipation. Thus it maintains high brightness levels with very little fading. The sealed lenses are made of strong UV protected PC and are aging and shock resistant; The BATWING optimized light distribution creates for a more uniform and wider lighting area.

INTENSITY LIGHT DISTRIBUTION

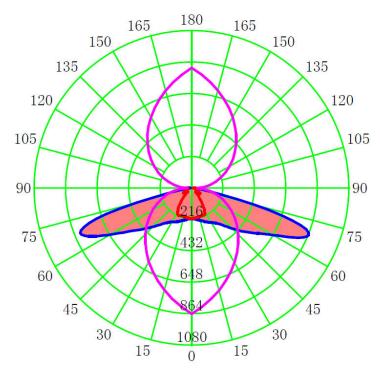



Traditional lighting distribution effect (Utilization<28%)





Hitechled D3 Solar Light lighting distribution effect (Utilization>80%)





Hitechled Optoelectronics Co.,Ltd.



Green Light, Green Life !

HITECHLED A2 SERIES ALL-IN-ONE SOLAR STREET LIGHT TECHINICAL DATA

Model No.		HT-SS-A240	HT-SS-A250	HT-SS-A260	HT-SS-A280	HT-SS-A2100
Physical Pa	arameters					
Power of PV Module (W)		40	50	60	80	100
Li-ion Battery Capacity (Wh)		231	308	346	461 or 538	538 or 614
Qty. of LED Chips (pcs)		96(OPTIONAL)	96(OPTIONAL)	96(OPTIONAL)	144(OPTIONAL)	144(OPTIONAL)
PIR Sensor		\checkmark	\checkmark	\checkmark	\checkmark	\checkmark
Net Weight of Product (kg)		12	14	16	22	24
Dimension of Product (mm)		840*380*200	980*380*200	1230*380*200	1435*380*75	1605*380*75
Controller Type		Smart MPPT	Smart MPPT	Smart MPPT	Smart MPPT	Smart MPPT
Light Paran	neters					
Light output (W)		Max 96W, Typical 20W	Max 96W, Typical 30W	Max 96W, Typical 40W	Max 144W, Typical 60W	Max 144W, Typical 80W
Light Distribution		150°/75°	150°/75°	150°/75°	150°/75°	150°/75°
Color Temperature (K)		6000	6000	6000	6000	6000
Typical Luminous Flux (lm)		2500~3500	3500~4500	4000~5500	6000~7500	7500~9000
Min. Working	Full Bright	12	14	18	12	12
Timo	Dim Mode	40	50	62	38	36
Lighting Mode (standard)		30% No motion Use 1 2 3 4 5 6 7 8 9 10 Dawn				
Packing Pa	irameters					
Dimension of Carton (mm)		900*450*300	1040*450*300	1290*450*300	1495*450*200	1665*450*20
Gross Weight of Product (kg)		14	16	18	47	52
Packing (pcs)		1	1	1	2	2
Environme	nt Requirements					
Charge Temperature		0°C~60°C	0°C~60°C	0°C~60°C	0°C~60°C	0°C ~60 °C
Discharge Temperature		-20°C~60°C	-20°C~60°C	-20°C~60°C	-30°C~60°C	-30°C~60° C
Storage Temperature		0°C~45°C	0°C~45℃	0°C~45°C	0°C~45°C	0°C~45°C
Mounting R	Recommendations	5				
Mounting height (m)		4~6	4~6	4~7	5~8	6~10
Space between the lamps (m)		8~15	8~20	10~20	10~20	15~25
Wind Load Rate (mph)		130	130	130	130	130
Top of Pole or Tenon OD (mm)		75~90	75~90	75~90	75~90	75~90
			Mounting Me	thod		

Simple installation! Fixing the screws and all done!





Hitechled Optoelectronics Co.,Ltd.





Operation Method:

Just switch on the "on/off" button, the lamp will start to work. That is all. It would turn on at dusk and turn off at dawn automatically.

Causions:

- Integrated solar led street light cannot work without sunshine charging, please select the suitable product model according to the local sunshine radiation and the annual total radiation.
- Integrated solar led street light adopts the long life Lithium battery for storing energy, charging temperature at day time is between: 0°C~+65°C, when temperature goes lower than 0°C, the control system will stop automatically to protect the battery, and it will revive to charge the battery while temperature goes higher than 0°C. Discharging temperature at night is between:-20°C~+65°C, any ambient beyond will bring damage to the battery. Please confirm your local extreme temperature is suitable for above while selecting the street light.
- Battery of the "integrated solar led street light" can be stored for 6 months long after full charged, and please examine, charge it periodically after long time transportation to prevent damage.
- While installed in Northern Hemisphere, please make sure the surface of the solar panel to be facing the South to collect maximum sunshine radiation, while installed in Southern Hemisphere, please make sure the surface of the solar panel to be facing the North to collect maximum sunshine radiation. At the same tie please keep it away from any shadow of house, trees etc.
- Keep cleaning the surface of the integrated solar led street light with normal detergent to get maximum power generation, clean the dust or tree leaves or any grease.
- Please avoid installing under the shadow of trees, building and other blocks.